

NASA TECH BRIEF

Lyndon B. Johnson Space Center



NASA Tech Briefs announce new technology derived from the U.S. space program. They are issued to encourage commercial application. Tech Briefs are available on a subscription basis from the National Technical Information Service, Springfield, Virginia 22151. Requests for individual copies or questions relating to the Tech Brief program may be directed to the Technology Utilization Office, NASA, Code KT, Washington, D.C. 20546.

Graphite/Polyimide Laminates with Near-Zero Thermal Expansion

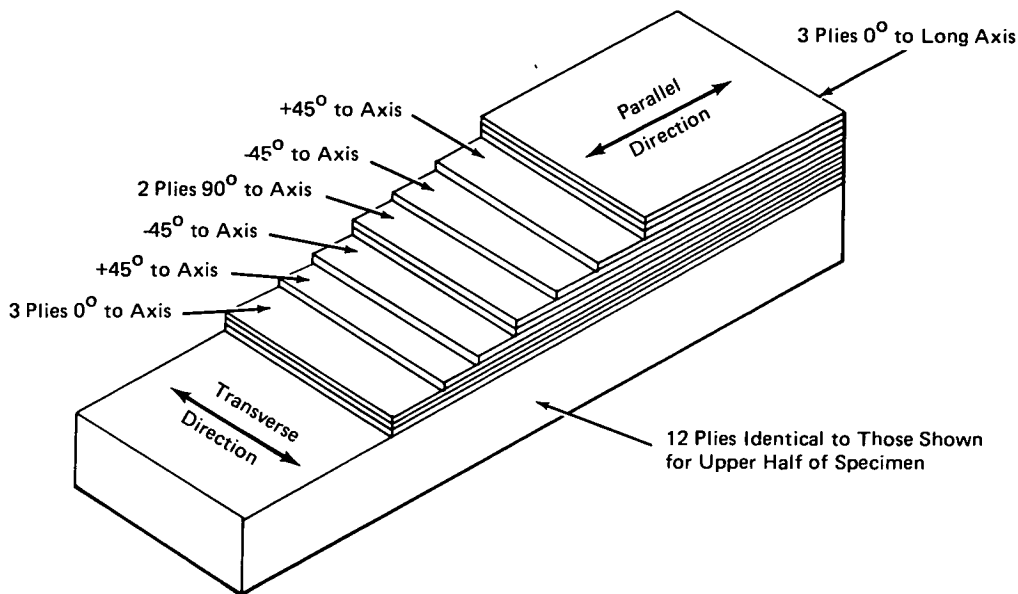


Figure 1. Graphite/Polyimide Shaft Layup

Composite structures of graphite and polyimides can be laminated to have very low coefficients of thermal expansion. Such structures are light and strong and have

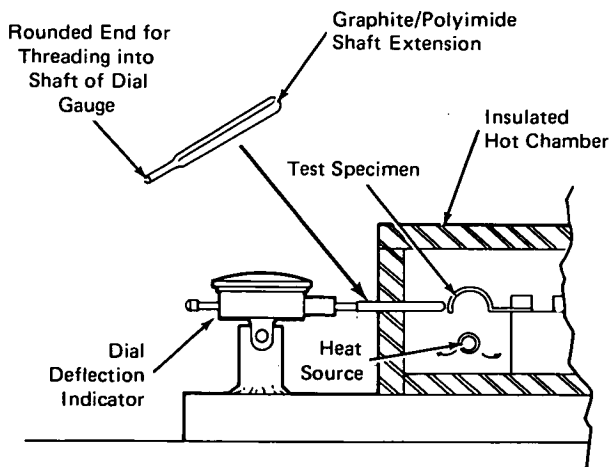


Figure 2. Dilatometer with Graphite/Polyimide Extension

many uses where expansion or contraction with temperature change is undesirable. One application is with instruments that measure thermal expansion.

The low thermal expansion is achieved through a special layup of the laminates. The unidirectional fiber-reinforced layers are oriented at angles with one another as shown in Figure 1. Depending on the materials used, coefficients of expansion for this layup are on the order of 10^{-7} over temperature ranges of 75 to 300° F (25 to 150° C).

These composites provide an order of magnitude improvement over quartz dilatometer systems (coefficient of thermal expansion about 10^{-6}) normally used to measure thermal expansion. A dilatometer has been designed (see Figure 2) that uses 1/8 x 1/8 x 2 in. (0.3 x 0.3 x 5 cm) strips of the composite as extensions between the dial indicator and the test specimen. The extensions are threaded into the shaft of the deflection indicators and eliminate thermal expansion in the deflection measuring system.

(continued overleaf)

Note:

Requests for further information may be directed to:

Technology Utilization Officer
Lyndon B. Johnson Space Center
Code JM7
Houston, Texas 77058
Reference: TSP73-10254

Patent status:

NASA has decided not to apply for a patent.

Source: W. N. Reynolds and
A. H. Striepens of
Rockwell International Corp.
under contract to
Johnson Space Center
(MSC-17662, 17928)